TYPE APPROVAL CERTIFICATE

DNV·GL

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the DNV GL Type Approval System.

Certificate No.

13 655 - 14 HH

Company

igus GmbH

Spicher Str. 1a 51447 Köln, Germany

Product Description

LSZH/TPE insulated and PUR sheathed, flame retardant chainflex fibre optic cable FOC (torsion protected) for shipboard and offshore

applications, especially for e-chain use

Type

CFLG.LB.PUR

Environmental Category

None

Technical Data / Range of Application Fibres:

Tight buffered fibres 0,9 mm: E9/125; G50/125; G62,5/125

Cable construction

FOC-fibre made out of glass with LSZH jacket Aramid damper for high tensile stresses

Optical fibre: FOC-f Filler if needed: Aram

Power cores

optional:

Copper conductors, TPE insulated, 300/500 V

Torsion protection: Extremly bending resistant aramid braid

for torsion protection PUR

Outer sheath:

special properties mentioned on page 2 and 3

Test Standard

IEC 60793-2-10/50:2011/2012; 60794-2-20:2007; 60794-1-2:2013;

60793-1-40:2001; IEC 60332-1-2:2004; UL Style: 10989

Documents

Test report :

TR-FO-2014-172, dated 10/Nov/2014

TR-FO-2014-173, dated 06/Nov/2014

Specification: CFLG.LB.PUR

Remarks

This certificate is issued on the basis of GL Guidelines for the Performance of

Type Approvals, Chapter 1 - Procedure (VI-7-1), Edition 2007 and the

GL Type Approval Procedure for Shipboard Cables.

Valid until 2020-05-04

Page

1 of 3

File No.

I.N.01

Hamburg, 2015-05-04

Type Approval Symbol

(GL)

DNV GL

Arne Schaarmann

Carsten Hunsalz

TYPE APPROVAL CERTIFICATE

DNV·GL

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the DNV GL Type Approval System.

Certificate No.

13 655 - 14 HH

The cables listed in this certificate are developed, tested and produced especially for continuously moving e-chain applications.

Apart from the qualities listed on page 1, the cables also fulfil the following special characteristics:

Explanation energy chain:

An energy chain (also e-chain, cable carrier or drag chain) is a component that guides and protects special flexible cables, pneumatic or hydraulic hoses.

You can find energy chains wherever moving machine parts need to be supplied with energy, data, liquids or gases.

Special characteristics cables

Due to the permanent bending and moving load of the cables in an energy chain, especially developed, tested and produced cables must have the following special properties:

- highly bending-resistant wires, or Fibres
- insulation materials with low mechanical aging due to bending load
- optimized pitch lengths stranding designs
- for shielded cables, highly bending-resistant braided shields with min. 80% optical coverage
- highly abrasion-resistant outer jacket materials
- highly bending-resistant outer jacket materials
- highly media, UV and ozone resistant outer jacket materials
- compact design for sufficient inherent rigidity (Not highly flexible!)
- have to withstand permanent bending tests in energy chains of min. 2-4 million double strokes (back and forth movement) without damage.
- undergo a minimum 15-20% batch production control through energy chain moving tests of at least 200.000 double strokes

Important note:

During the installation of cables in moving energy chains, special assembly and strain relief instructions have to be taken into account.

For further details check: www.igus.de

Valid until 2020-05-04

Page

2 of 3

File No.

I.N.01

Hamburg, 2015-05-04

Type Approval Symbol

(GL

DNV GL

Arne Schaarmann

Carsten Hunsalz


TYPE APPROVAL CERTIFICATE

DNV-GL

This is to certify that the undernoted product(s) has/have been tested in accordance with the relevant requirements of the DNV GL Type Approval System.

Certificate No.

13 655 - 14 HH

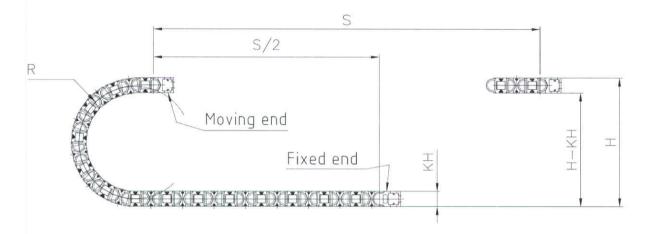

Properties according to specification no.:

chainflex

CFLG.LB.PUR

Valid until 2020-05-04

Page

3 of 3

File No.

I.N.01

Hamburg, 2015-05-04

DNV GL

Type Approval Symbol

Arne Schaarmann

Carsten Hunsalz